

FEATURES


- High Accuracy、 Large Current
 - 0~100A Current sensor
 - Low primary conductor resistance: 0.45mΩ
 - Typical V_{OE} temperature drift: $\pm 2\text{mV}$
 - Typical sensitivity temperature drift: $\pm 0.5\%$
 - Typical linearity error: $\pm 0.1\%$
- High Bandwidth, Fast Response
 - Typical bandwidth: 250kHz
 - Typical response time: 1.6μs
- High Anti-interference, High Insolution
 - Differential hall effectively resists external magnetic field interference
 - Isolated voltage: 5000Vrms
 - Compatible with 3.3V/5V power supply
 - Ratiometric/fixed output

DESCRIPTION

GC1868 series is an open loop hall current sensor that sets high accuracy, high bandwidth, fast response, high linearity, low temperature drift and other advantages. GC1868 provides 0~50A current measurement range. GC1868 provides a new solution in high performance current sensor area, besides, differential hall sets can immune stray field. GC1868 has passed TUV and CE certification.



PACKAGE

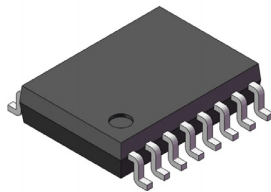

SOIC-16

TYPICAL APPLICATIONS

- White Goods
- Microinverter
- Power Supply
- Motor Control

TYPICAL APPLICATION CIRCUIT

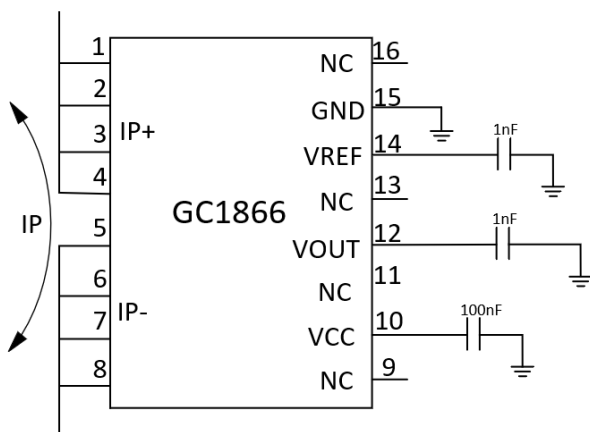


Figure 1. Typical Application Circuit Diagram Of Type A

THERMAL CURVE

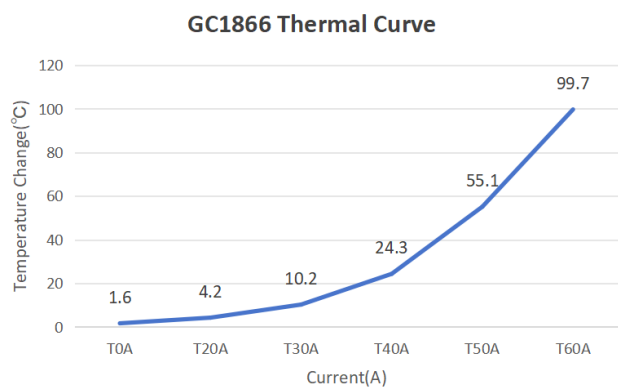


Figure 2. Thermal Curve

(Thermal Curve was measured by Matrixsens using MSEVB0004GC1866REVA0 EVM in Zhangjiagang application laboratory at room temperature and no wind.)

SELECTION GUIDE

Part Number	Output Mode	$I_{PR}(A)$	Sensitivity (mV/A)		MSL Rating	Operating Temperature	Packing
			$V_{CC}=3.3V(*=3.3)$	$V_{CC}=5V(*=5)$			
GC1866D*-AR10FB-T	Fixed Output Mode	±10	132	200	3	-40°C to 125°C	Tape and reel, 1000 pieces per reel
GC1866D*-AR12FB-T		±12	110	166.7			
GC1866D*-AR20FB-T		±20	66	100			
GC1866D*-AR30FB-T		±30	44	66.7			
GC1866D*-AR30FU-T		30	88	133.3			
GC1866D*-AR40FB-T		±40	33	50			
GC1866D*-AR50FB-T		±50	26.4	40			
GC1866D*-AR65FB-T		±65	20.3	30.8			
GC1866D*-AR100FB-T		±100	13.2	20			
GC1866D*-AR10FB-T	Ratiometric Output Mode	±10	132	200			
GC1866D*-AR12RB-T		±12	110	166.7			
GC1866D*-AR20RB-T		±20	66	100			
GC1866D*-AR30RB-T		±30	44	66.7			
GC1866D*-AR30RU-T		30	88	133.3			
GC1866D*-AR40RB-T		±40	33	50			
GC1866D*-AR50RB-T		±50	26.4	40			
GC1866D*-AR65RB-T		±65	20.3	30.8			
GC1866D*-AR100FB-T		±100	13.2	20			

Note: Continuous testing at 25°C supports 50A, if the test range increases or the ambient temperature rises, please refer to the derating curve in application manuals to take heat dissipation measures. Take 30A bipolar as an example, 20A and above have unipolar output mode with 5V supply, new range will be added without notice.

PART NUMBER SPECIFICATION

GC1866 D 5 - A R 20 R B - T

								Whether it contains lead
								• T: Lead-free process
								Output polarity
								• B: Bipolar
								• U: Unipolar
								Output mode
								• F: Fixed
								• R: Ratiometric
								Current sensing range
								Packing requirement
								• U: Tube(only small samples are available)
								• R: Tape and reel
								Pin sequence
								• A: 10-legVCC, 12-legVOUT, 14-legVREF, 15-legGND
								• B: 14-legVCC, 12-legVOUT, 11-legFILTER, 9-legGND
								• C: 10-legVCC, 12-legVOUT, 13-legVREF, 15-legGND
								Supply voltage
								• 3: 3.3V
								• 5: 5V
								Insulation class
								• D: 2000 ≤ D ≤ 5000V
								Product model

CONTENTS

1.ABSOLUTE MAXIMUM RATINGS	4
2.ESD RATINGS.....	4
3.ISOLATION CHARACTERISTICS	4
4.PINOUT DIAGRAM & FUNCTIONAL BLOCK DIAGRAM.....	4
5.ELECTRICAL CHARACTERISTICS	6
GC1866D*-AR10FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	7
GC1866D*-AR12FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	8
GC1866D*-AR20FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	9
GC1866D*-AR30FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	10
GC1866D*-AR30FU-T/RU-T PERFORMANCE CHARACTERISTICS.....	11
GC1866D*-AR40FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	12
GC1866D*-AR50FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	13
GC1866D*-AR65FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	14
GC1866D*-AR100FB-T/RB-T PERFORMANCE CHARACTERISTICS.....	15
6.PARAMTERS DESCRIPTION.....	16
7.THERMAL EVALUATION	17
8.LAYOUT GUIDELINES.....	18
9.PACKAGE OUTLINE.....	19
10.TAPE AND REEL & STORAGE INFORMATION.....	20
11.SAFETY WARNING.....	21
12.REVISION HISTORY.....	22

1. ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Unit	Min.	Typ.	Max.
Supply Voltage	V_{CC}	V	-0.3	/	6.5
Maximum Output Current	I_{OUTmax}	mA	-45	/	45
Maximum Output Voltage	V_{OUTmax}	V	0.1	/	$V_{CC}-0.1$
Storage temperature	T_S	°C	-55	/	150
Operating Ambient Temperature	T_A	°C	-40	/	125
Maximum Junction Temperature	T_{Jmax}	°C	/	/	165

Note: Operation outside the absolute maximum ratings may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under recommended operating conditions. If used outside the recommended operating conditions but within the absolute maximum ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

2. ESD RATINGS

Characteristic	Symbol	Unit	Notes	Value
Human Body Model	V_{HBM}	kV	According to ANSI/ESDA/JEDEC JS-001	±6
Charged Device Model	V_{CDM}	kV	According to ANSI/ESDA/JEDEC JS-002	±1

3. ISOLATION CHARACTERISTICS

Characteristic	Symbol	Unit	Notes	Value
Dielectric Surge Voltage	V_{SURGE}	kV	Test method refers to IEC61000-4-5, 1.2μs/50μs waveform.	10
Dielectric Strength Test Voltage	V_{ISO}	V_{RMS}	60s, 50Hz isolation withstand voltage parameters, according to UL62368-1, test 1.2 V_{ISO} /1s before delivery to verify the insulation performance, and verify the partial discharge is less than 5pc.	5000
Working Voltage for Basic Isolation	V_{WVBI}	V_{PK} or V_{CC}	Maximum approved working voltage for basic (single) isolation according to UL60950-1.	1550
		V_{RMS}		1097
Creepage	D_{CR}	mm	Minimum distance along package body from IP leads to signal leads.	8.0
Comparative Tracking Index	CTI	V	Material Group II	400~599

4. PINOUT DIAGRAM & FUNCTIONAL BLOCK DIAGRAM

Mode A:

Number	Name	Description
1,2,3,4	IP+	Current flows into the chip, positive direction
5,6,7,8	IP-	Current flows out of the chip, negative direction
9,11,13,16	NC	No connect
10	VCC	Device power supply terminal pin
12	VOUT	Analog output signal pin
14	VREF	Zero current reference voltage pin
15	GND	Signal ground terminal

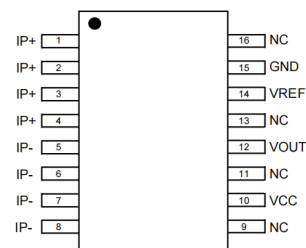


Figure 3. Mode A Pin Diagram

Mode B:

Number	Name	Description
1,2,3,4	IP+	Current flows into the chip, positive direction
5,6,7,8	IP-	Current flows out of the chip, negative direction
10,13,15,16	NC	No connect
9	GND	Signal ground terminal
11	FILTER	Bandwidth setting
12	VOUT	Analog output signal pin
14	VCC	Device power supply terminal pin

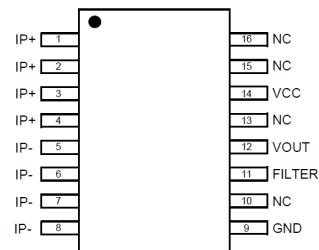


Figure 4. Mode B Pin Diagram

Mode C:

Number	Name	Description
1,2,3,4	IP+	Current flows into the chip, positive direction
5,6,7,8	IP-	Current flows out of the chip, negative direction
9,11,14,16	NC	No connect
10	VCC	Device power supply terminal pin
12	VOUT	Analog output signal pin
13	VREF	Zero current reference voltage pin
15	GND	Signal ground terminal

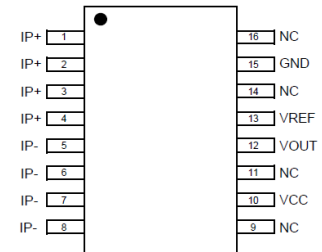


Figure 5. Mode C Pin Diagram

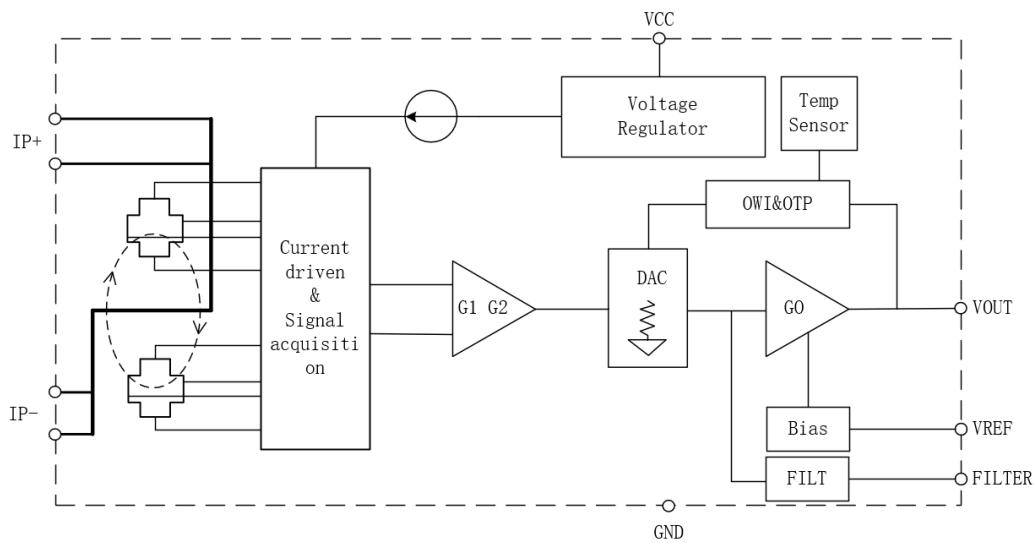


Figure 6. Functional Block Diagram

5. ELECTRICAL CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ.	Max.
Supply Voltage	V_{CC}	V	*=3	3	3.3	3.6
			*=5	4.5	5	5.5
Supply Current ^{Note1}	I_{CC}	mA	no-load, $V_{CC}=3.3\text{V}$	/	7.5	10
			no-load, $V_{CC}=5\text{V}$	/	10	15
Primary Conductor Resistance ^{Note1}	R_P	m Ω	/	/	0.45	/
Power-On Time ^{Note2}	T_{PO}	ms	Chip power-on ($V_{CC}>3.0\text{V}$), V_{OUT} and V_{REF} stable time Chip power-on ($V_{CC}>4.5\text{V}$), V_{OUT} and V_{REF} stable time	/	1	/
Output Capacitive Load ^{Note2}	C_L	nF	/	/	/	10
Output Resistive Load ^{Note2}	R_L	k Ω	/	4.7	/	/
Reference Resistive Load ^{Note2}	R_{LREF}	k Ω	/	10	/	/
Output Voltage Range ^{Note2}	V_S	V	$R_L=10\text{k}\Omega$ to V_{CC} or V_{GND}	0.1	/	$V_{CC}-0.1$
Common Mode Field Rejection ^{Note2}	$CMFR$	dB	/	/	40	/
Rise Time	T_r	μs	GC1866D5-AR30FB-T	/	1.2	/
Response Time	$T_{RESPONSE}$	μs	GC1866D5-AR30FB-T	/	1.6	/
Internal Bandwidth	BW	kHz	GC1866D5-AR30FB-T, 基于小信号测量	/	250	/
Output Noise	V_N	mVrms	GC1866D5-AR30FB-T	/	8	/
Nonlinearity ^{Note1}	E_{LIN}	%	/	/	± 0.1	± 0.3
Reference Voltage ^{Note1}	V_{REF}	V	Fixed output, Bipolar, $V_{CC}=5\text{V}$	2.49	2.5	2.51
			Fixed output, Bipolar, $V_{CC}=3.3\text{V}$	1.64	1.65	1.66
			Fixed output, Unipolar, $V_{CC}=5\text{V}$	0.49	0.5	0.51
			Ratiometric output, Bipolar	/	$V_{CC}\times 0.5$	/
Ratiometric Output Sensitivity Error ^{Note1}	S_{ERR}	%	$V_{CC}=3.15\sim 3.45\text{V}$ or $V_{CC}=4.75\sim 5.25\text{V}$	/	0.6	/
Sensitivity Temperature Drift ^{Note1}	dS_{ERR}	%	$I_P=I_{PRmax}$, $T_A=-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	-1.5	± 0.5	1.5
Offset Temperature Drift ^{Note1}	$V_{IOUT(Q)TC}$	mV	$I_P=0\text{A}$, $T_A=-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	-10	± 5	10

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: These parameters are guaranteed by design.

GC1866D*-AR10FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-10	/	10
Sensitivity(*=3)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	132	/
Sensitivity(*=5)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	200	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, $I_{PR}=0A$, $V_{CC}=3.3V$, Fixed output	1.64	1.65	1.66
			Bipolar, $I_{PR}=0A$, $V_{CC}=5V$, Fixed output	2.49	2.5	2.51
			Bipolar, $I_{PR}=0A$, Ratiometric output	/	$V_{CC} \cdot 0.5$	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	$I_P=I_{PRmax}$, $T_A=-40^{\circ}C \sim 125^{\circ}C$	-1.6	± 0.6	1.6
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT} - V_{IOUT\ Ideal}) / (Sens_{Ideal} \times I_P) \times 100\%$, $E_{TOT} = ((V_{IOUT\ Meas} - V_{REF\ Meas}) - (V_{IOUT\ Ideal} - V_{REF\ Ideal})) / (Sens_{Ideal} \times I_P) \times 100\%$						
Sensitivity Error	E_{SENS}	%	$I_P=I_{PRmax}$, $T_A=25^{\circ}C \sim 125^{\circ}C$	-1.4	± 0.6	1.4
			$I_P=I_{PRmax}$, $T_A=-40^{\circ}C \sim 25^{\circ}C$	-1.0	± 0.6	1.0
Offset Error ^{Note2}	V_{OE}	mV	$I_P=0A$, $T_A=25^{\circ}C \sim 125^{\circ}C$	-10	± 2	10
			$I_P=0A$, $T_A=25^{\circ}C$	-5	± 2	5
			$I_P=0A$, $T_A=-40^{\circ}C \sim 125^{\circ}C$	-10	± 2	10
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, $T_A=25^{\circ}C$	/	± 0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, $T_A=25^{\circ}C$	/	± 0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR12FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-12	/	12
Sensitivity(*=3)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	110	/
Sensitivity(*=5)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	166.7	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, $I_{PR}=0A$, $V_{CC}=3.3V$, Fixed output	1.64	1.65	1.66
			Bipolar, $I_{PR}=0A$, $V_{CC}=5V$, Fixed output	2.49	2.5	2.51
			Bipolar, $I_{PR}=0A$, Ratiometric output	/	$V_{CC} \cdot 0.5$	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	$I_P=I_{PRmax}$, $T_A=-40^{\circ}C \sim 125^{\circ}C$	-1.6	± 0.6	1.6
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT} - V_{IOUT Ideal}) / (Sens_{Ideal} \times I_P) \times 100\%$, $E_{TOT} = ((V_{IOUT Meas} - V_{REF Meas}) - (V_{IOUT Ideal} - V_{REF Ideal})) / (Sens_{Ideal} \times I_P) \times 100\%$						
Sensitivity Error	E_{SENS}	%	$I_P=I_{PRmax}$, $T_A=25^{\circ}C \sim 125^{\circ}C$	-1.4	± 0.6	1.4
			$I_P=I_{PRmax}$, $T_A=-40^{\circ}C \sim 25^{\circ}C$	-1.0	± 0.6	1.0
Offset Error ^{Note2}	V_{OE}	mV	$I_P=0A$, $T_A=25^{\circ}C \sim 125^{\circ}C$	-10	± 2	10
			$I_P=0A$, $T_A=25^{\circ}C$	-5	± 2	5
			$I_P=0A$, $T_A=-40^{\circ}C \sim 125^{\circ}C$	-10	± 2	10
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, $T_A=25^{\circ}C$	/	± 0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, $T_A=25^{\circ}C$	/	± 0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR20FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-20	/	20
Sensitivity(V_{CC} =3.3V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	66	/
Sensitivity(V_{CC} =5V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	100	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, I_{PR} =0A, V_{CC} =3.3V, Fixed output	1.64	1.65	1.66
			Bipolar, I_{PR} =0A, V_{CC} =5V, Fixed output	2.49	2.5	2.51
			Bipolar, I_{PR} =0A, Ratiometric output	/	V_{CC} *0.5	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	I_P = I_{PRmax} , T_A =-40°C ~ 125°C	-1.6	±0.5	1.6
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT} - V_{IOUT Ideal}) / (Sens_{Ideal} \times I_P) \times 100\%$, $E_{TOT} = ((V_{IOUT Meas} - V_{REF Meas}) - (V_{IOUT Ideal} - V_{REF Ideal})) / (Sens_{Ideal} \times I_P) \times 100\%$						
Sensitivity Error	E_{SENS}	%	I_P = I_{PRmax} , T_A =25°C ~ 125°C	-1.5	±0.5	1.5
			I_P = I_{PRmax} , T_A =-40°C ~ 25°C	-1.0	±0.5	1.0
Offset Error ^{Note2}	V_{OE}	mV	I_P =0A, T_A =25°C ~ 125°C	-10	±2	10
			I_P =0A, T_A =25°C	-5	±2	5
			I_P =0 A, T_A =-40°C ~ 125°C	-10	±2	10
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, T_A =25°C	/	±0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, T_A =25°C	/	±0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR30FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-30	/	30
Sensitivity(V_{CC} =3.3V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	44	/
Sensitivity(V_{CC} =5V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	66.7	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, I_{PR} =0A, V_{CC} =3.3V, Fixed output	1.64	1.65	1.66
			Bipolar, I_{PR} =0A, V_{CC} =5V, Fixed output	2.49	2.5	2.51
			Bipolar, I_{PR} =0A, Ratiometric output	/	V_{CC} *0.5	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	I_P = I_{PRmax} , T_A =-40°C ~ 125°C	-1.6	±0.5	1.6
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT} - V_{IOUT\ Ideal}) / (Sens_{Ideal} \times I_P) \times 100\%$, $E_{TOT} = ((V_{IOUT\ Meas} - V_{REF\ Meas}) - (V_{IOUT\ Ideal} - V_{REF\ Ideal})) / (Sens_{Ideal} \times I_P) \times 100\%$						
Sensitivity Error	E_{SENS}	%	I_P = I_{PRmax} , T_A =25°C ~ 125°C	-1.5	±0.5	1.5
			I_P = I_{PRmax} , T_A =-40°C ~ 25°C	-1.0	±0.5	1.0
Offset Error ^{Note2}	V_{OE}	mV	I_P =0A, T_A =25°C ~ 125°C	-8	±2	8
			I_P =0A, T_A =25°C	-5	±2	5
			I_P =0 A, T_A =-40°C ~ 125°C	-8	±2	8
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, T_A =25°C	/	±0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, T_A =25°C	/	±0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR30FU-T/RU-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	0	/	30
Sensitivity(V_{CC} =3.3V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	88	/
Sensitivity(V_{CC} =5V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	133.3	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Unipolar, I_{PR} =0A, V_{CC} =3.3V, Fixed output	0.32	0.33	0.34
			Unipolar, I_{PR} =0A, V_{CC} =5V, Fixed output	0.49	0.5	0.51
			Unipolar, I_{PR} =0A, Ratiometric output	/	V_{CC} *0.1	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	I_P = I_{PRmax} , T_A =-40°C ~ 125°C	-1.6	±0.5	1.6
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT} - V_{IOUT\ Ideal}) / (Sens_{Ideal} \times I_P) \times 100\%$, $E_{TOT} = ((V_{IOUT\ Meas} - V_{REF\ Meas}) - (V_{IOUT\ Ideal} - V_{REF\ Ideal})) / (Sens_{Ideal} \times I_P) \times 100\%$						
Sensitivity Error	E_{SENS}	%	I_P = I_{PRmax} , T_A =25°C ~ 125°C	-1.5	±0.5	1.5
			I_P = I_{PRmax} , T_A =-40°C ~ 25°C	-1.0	±0.5	1.0
Offset Error ^{Note2}	V_{OE}	mV	I_P =0A, T_A =25°C ~ 125°C	-8	±2	8
			I_P =0A, T_A =25°C	-5	±2	5
			I_P =0 A, T_A =-40°C ~ 125°C	-8	±2	8
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, T_A =25°C	/	±0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, T_A =25°C	/	±0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR40FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-40	/	40
Sensitivity(V_{CC} =3.3V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	33	/
Sensitivity(V_{CC} =5V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	50	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, I_{PR} =0A, V_{CC} =3.3V, Fixed output	1.64	1.65	1.66
			Bipolar, I_{PR} =0A, V_{CC} =5V, Fixed output	2.49	2.5	2.51
			Bipolar, I_{PR} =0A, Ratiometric output	/	V_{CC} *0.5	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	I_P = I_{PRmax} , T_A =-40°C ~125°C	-1.6	±0.6	1.6
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT}$ - $V_{IOUT\ Ideal}$)/($Sens_{Ideal}$ × I_P)×100%, $E_{TOT} = ((V_{IOUT\ Meas}$ - $V_{REF\ Meas}$)-($V_{IOUT\ Ideal}$ - $V_{REF\ Ideal}$))/($Sens_{Ideal}$ × I_P)×100%						
Sensitivity Error	E_{SENS}	%	I_P = I_{PRmax} , T_A =25°C ~ 125°C	-1.5	±0.6	1.5
			I_P = I_{PRmax} , T_A =-40°C ~ 25°C	-1.5	±0.6	1.5
Offset Error ^{Note2}	V_{OE}	mV	I_P =0A, T_A =25°C ~ 125°C	-7	±2	7
			I_P =0A, T_A =25°C	-5	±2	5
			I_P =0 A, T_A =-40°C ~ 125°C	-7	±2	7
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, T_A =25°C	/	±0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, T_A =25°C	/	±0.5	/

Note1: These parameters are obtained from laboratory testing with 3σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR50FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-50	/	50
Sensitivity(V_{CC} =3.3V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	26.4	/
Sensitivity(V_{CC} =5V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	40	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, I_{PR} =0A, V_{CC} =3.3V, Fixed output	1.64	1.65	1.66
			Bipolar, I_{PR} =0A, V_{CC} =5V, Fixed output	2.49	2.5	2.51
			Bipolar, I_{PR} =0A, Ratiometric output	/	V_{CC} *0.5	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	I_P = I_{PRmax} , T_A =-40°C ~ 125°C	-1.6	±0.6	1.6
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT} - V_{IOUT\ Ideal}) / (Sens_{Ideal} \times I_P) \times 100\%$, $E_{TOT} = ((V_{IOUT\ Meas} - V_{REF\ Meas}) - (V_{IOUT\ Ideal} - V_{REF\ Ideal})) / (Sens_{Ideal} \times I_P) \times 100\%$						
Sensitivity Error	E_{SENS}	%	I_P = I_{PRmax} , T_A =25°C ~ 125°C	-1.5	±0.6	1.5
			I_P = I_{PRmax} , T_A =-40°C ~ 25°C	-1.0	±0.6	1.0
Offset Error ^{Note2}	V_{OE}	mV	I_P =0 A, T_A =25°C ~ 125°C	-6	±2	6
			I_P =0 A, T_A =25°C	-5	±2	5
			I_P =0 A, T_A =-40°C ~ 25°C	-6	±2	6
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, T_A =25°C	/	±0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, T_A =25°C	/	±0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR65FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-65	/	65
Sensitivity(V_{CC} =3.3V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	20.3	/
Sensitivity(V_{CC} =5V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	30.8	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, I_{PR} =0A, V_{CC} =3.3V, Fixed output	1.64	1.65	1.66
			Bipolar, I_{PR} =0A, V_{CC} =5V, Fixed output	2.49	2.5	2.51
			Bipolar, I_{PR} =0A, Ratiometric output	/	V_{CC} *0.5	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	I_P = I_{PRmax} , T_A =-40°C ~ 125°C	-1.8	±0.6	1.8
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT} - V_{IOUT\ Ideal}) / (Sens_{Ideal} \times I_P) \times 100\%$, $E_{TOT} = ((V_{IOUT\ Meas} - V_{REF\ Meas}) - (V_{IOUT\ Ideal} - V_{REF\ Ideal})) / (Sens_{Ideal} \times I_P) \times 100\%$						
Sensitivity Error	E_{SENS}	%	I_P = I_{PRmax} , T_A =25°C ~ 125°C	-1.5	±0.6	1.5
			I_P = I_{PRmax} , T_A =-40°C ~ 25°C	-1.2	±0.6	1.2
Offset Error ^{Note2}	V_{OE}	mV	I_P =0 A, T_A =25°C ~ 125°C	-6	±2	6
			I_P =0 A, T_A =25°C	-5	±2	5
			I_P =0 A, T_A =-40°C ~ 25°C	-6	±2	6
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, T_A =25°C	/	±0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, T_A =25°C	/	±0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

GC1866D*-AR100FB-T/RB-T DEVICE PERFORMANCE CHARACTERISTICS

$T_A=25^{\circ}\text{C}$, $V_{CC}=5\text{V}/3.3\text{V}$, $C_{REF}=1\text{nF}$, $C_L=1\text{nF}$, $C_{VCC}=100\text{nF}$ (Unless otherwise noted)

Characteristic	Symbol	Unit	Test Conditions	Min.	Typ. ^{Note1}	Max.
NOMINAL PERFORMANCE						
Current Sensing Range	I_{PR}	A	/	-100	/	100
Sensitivity(V_{CC} =3.3V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	13.2	/
Sensitivity(V_{CC} =5V)	$Sens$	mV/A	$I_{PRmin} < I_{PR} < I_{PRmax}$	/	20	/
Zero Current Output Voltage	$V_{IOUT(Q)}$	V	Bipolar, I_{PR} =0A, V_{CC} =3.3V, Fixed output	1.64	1.65	1.66
			Bipolar, I_{PR} =0A, V_{CC} =5V, Fixed output	2.49	2.5	2.51
			Bipolar, I_{PR} =0A, Ratiometric output	/	V_{CC} *0.5	/
ACCURACY PERFORMANCE						
Total Output Error	E_{TOT}	%	I_P = I_{PRmax} , T_A =-40°C ~ 125°C	-2.5	±0.8	2.5
TOTAL OUTPUT ERROR COMPONENTS: $E_{TOT} = (V_{IOUT}$ - $V_{IOUT\ Ideal}$)/($Sens_{Ideal}$ × I_P)×100%, $E_{TOT} = ((V_{IOUT\ Meas}$ - $V_{REF\ Meas}$)-($V_{IOUT\ Ideal}$ - $V_{REF\ Ideal}$))/($Sens_{Ideal}$ × I_P)×100%						
Sensitivity Error	E_{SENS}	%	I_P = I_{PRmax} , T_A =25°C ~ 125°C	-2.0	±0.6	2.0
			I_P = I_{PRmax} , T_A =-40°C ~ 25°C	-1.8	±0.6	1.8
Offset Error ^{Note2}	V_{OE}	mV	I_P =0 A, T_A =25°C ~ 125°C	-6	±2	6
			I_P =0 A, T_A =25°C	-5	±2	5
			I_P =0 A, T_A =-40°C ~ 25°C	-6	±2	6
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E_{SENS_drift}	%	After reliability test, T_A =25°C	/	±0.5	/
Total Output Error Lifetime Drift	E_{TOT_drift}	%	After reliability test, T_A =25°C	/	±0.5	/

Note1: These parameters are obtained from laboratory testing with 3 σ data.

Note2: Offset error refers to ratiometric output mode of unipolar output or fixed output mode of differential output.

6. PARAMETERS DESCRIPTION

6.1 Sensitivity S_{ens}

The change in sensor IC output in response to a 1A change through the primary conductor. The sensitivity is the product of the magnetic circuit sensitivity (G/A) ($1G = 0.1 \text{ mT}$) and the linear IC amplifier gain (mV/G). The linear IC amplifier gain is programmed at the factory to optimize the sensitivity (mV/A) for the full-scale current of the device.

6.2 Sensitivity error E_{SENS}

Sensitivity error E_{SENS} refers to the percentage deviation between the actual measured sensitivity and the ideal sensitivity.

For example, when $V_{\text{CC}} = 5V$,

$$E_{\text{SENS}} = (S_{\text{ens_Mens}}(5V) - S_{\text{ens_Ideal}}(5V)) / S_{\text{ens_Ideal}}(5V) \times 100\%$$

6.3 The sensitivity temperature drift of dS_{ERR}

Over the entire operating temperature range is defined as:

$$dS_{\text{ERR}} = (S_{\text{ens}}(T_A) - S_{\text{ens}}(25^\circ\text{C})) / S_{\text{ens}}(25^\circ\text{C}) \times 100\%$$

6.4 Saturation output voltage $V_{\text{OUT-SAT(H/L)}}$

$V_{\text{OUT-SAT(H)}}$ is the maximum output of the chip under the positive current.

$V_{\text{OUT-SAT(L)}}$ is the maximum output of the chip under negative current.

6.5 Zero current output voltage $V_{\text{IOUT(Q)}}$

$I_p = 0$, Output voltage of the sensor $V_{\text{IOUT(Q)}}$.

For bipolar devices, the output voltage $V_{\text{IOUT(Q)}} = V_{\text{CC}} \times 0.5$,

For unipolar devices, the output voltage $V_{\text{IOUT(Q)}} = V_{\text{CC}} \times 0.1$.

Variation in $V_{\text{IOUT(Q)}}$ can be attributed to the resolution of the linear IC quiescent voltage trim and thermal drift.

6.6 Offset voltage V_{OE}

Used to measure the influence of external non-magnetic factors. Under zero-current conditions, in ratiometric output mode, it is the difference between the actual output voltage and the theoretical output voltage. In fixed output mode, it is the difference between the actual output voltage and the actual V_{REF} voltage.

6.7 Offset temperature drift $V_{\text{IOUT(Q)TC}}$

Due to internal circuit tolerance and heat dissipation, static output voltage due to internal circuit tolerance and heat dissipation $V_{\text{OUT(Q)}}$ differential static output voltage V_{OE} . May shift with operating temperature $V_{\text{OUT(Q)TC}}$.

Defined in ratiometric output mode:

$$V_{\text{IOUT(Q)TC}} = V_{\text{OUT(Q)(TA)}} - V_{\text{OUT(25}^\circ\text{C)}}$$

Defined in fixed output mode:

$$V_{\text{IOUT(Q)TC}} = (V_{\text{OUT(Q)(TA)}} - V_{\text{REF(TA)}}) - (V_{\text{OUT(Q)(25}^\circ\text{C)}} - V_{\text{REF(25}^\circ\text{C)}})$$

6.8 Noise V_N

Noise is the macroscopic sum of thermal noise and shot noise inside the current sensor.

Dividing the noise (mV) by the sensitivity (mV/A) gives the smallest current that the device can resolve.

6.9 Symmetry E_{SYM}

Definition: The relationship between the actual output voltage $V_{\text{IOUT(Q)}}$ and the forward half-range $V_{\text{IOUT-POSHALF}}$ and reverse half-range $V_{\text{IOUT-NEGHALF}}$ outputs.

The formula is defined as follows:

$$E_{\text{SYM}} = (1 - (V_{\text{IOUT-POSHALF}} - V_{\text{IOUT(Q)}}) / (V_{\text{IOUT(Q)}} - V_{\text{IOUT-NEGHALF}})) \times 100\%$$

6.10 Nonlinearity E_{LIN}

The design output of the device varies linearly with the measured current.

Ideally, under the same supply voltage and ambient temperature conditions, the output sensitivity of the device is the same for two different current sizes I_1 (half scale current) and I_2 (full scale current).

In practical application, there is a difference in sensitivity for the measurement of two different current sizes I_1 and I_2 , and nonlinear sensitivity error E_{LIN} describes the difference digitally.

In the chip, positive current nonlinearity E_{LINPOS} and negative current nonlinearity E_{LINNEG} are defined as follows:

I_{POSx} , I_{NEGx} is positive current and negative current

$$I_{\text{POS2}} = 2 \times I_{\text{POS1}}$$

$$I_{\text{NEG2}} = 2 \times I_{\text{NEG1}}$$

$$S_{\text{ens}_x} = (V_{\text{IOUT(Ix)}} - V_{\text{IOUT(Q)}}) / I_x$$

$$E_{\text{LINPOS}} = (1 - (S_{\text{ens}_{I_{\text{POS2}}}} / S_{\text{ens}_{I_{\text{POS1}}}})) \times 100\%$$

$$E_{\text{LINNEG}} = (1 - (S_{\text{ens}_{I_{\text{NEG2}}}} / S_{\text{ens}_{I_{\text{NEG1}}}})) \times 100\%$$

6. PARAMETERS DESCRIPTION (CONTINUED)

6.11 Proportional output sensitivity error S_{ERR}

The proportional output sensitivity error S_{ERR} is defined based on the supply voltage V_{CC} :

$$S_{ERR} = (1 - (Sens_{V_{CC}} / Sens_{5V}) / (V_{CC} / 5V)) \times 100\%$$

$$S_{ERR} = (1 - (Sens_{V_{CC}} / Sens_{3.3V}) / (V_{CC} / 3.3V)) \times 100\%$$

Proportional output error of static voltage V_{0zero}

Error between the ratio of V_{out1} and V_{out0} value at $V_{CC}=5V$ and the theoretical ratio when V_{CC} varies from 4.5V to 5.5V, or at $V_{CC}=3.3V$ and the theoretical ratio when V_{CC} varies from 3.0V to 3.6V.

$$V_{0zero} = (1 - (V_{out1} / V_{out0}) / (V_{CC} / 5V)) \times 100\%$$

$$V_{0zero} = (1 - (V_{out1} / V_{out0}) / (V_{CC} / 3.3V)) \times 100\%$$

6.12 Total output error E_{TOT}

The difference between the current measurement from the sensor IC and the actual current (I_p), relative to the actual current. This is equivalent to the difference between the ideal output voltage and the actual output voltage, divided by the ideal sensitivity, relative to the current flowing through the primary conduction path:

$$E_{TOT} = (V_{IOUT} - V_{IOUT Ideal}) / (Sens_{Ideal} \times I_p) \times 100\%$$

Defined in fixed output mode:

$$E_{TOT} = ((V_{IOUT Meas} - V_{REF Meas}) - (V_{IOUT Ideal} - V_{REF Ideal})) / (Sens_{Ideal} \times I_p) \times 100\%$$

Where: Total output error E_{TOT} contains all error sources and is a function of I_p .

$$V_{IOUT Ideal} = V_{IOUT(Q)} + (Sens_{Ideal} \times I_p)$$

At relatively large current, E_{TOT} is mainly sensitivity error, while at relatively small current, E_{TOT} is mainly zero current sensitivity error voltage V_{OE} . As I_p approaches zero, E_{TOT} approaches infinity due to the bias voltage.

6.13 Dynamic response characteristic

6.13.1 Power-On time T_{PO}

When the supply is ramped to its operating voltage, the device requires a finite amount of time to power its internal components before responding to an input magnetic field. Power-On Time (T_{PO}) is defined as the time interval between the power supply has reached its minimum specified operating voltage (V_{UVLOD}) and the sensor output has settled within $\pm 10\%$ of its steady-state value under an applied magnetic field.

6.13.2 Rise time T_r

The time interval between the sensor output voltage reaches 10% of its full-scale value and it reaches 90% of its full-scale value.

6.13.3 Propagation delay T_{PROP}

The time interval between the sensed primary current reaches 20% of its final value and the sensor output voltage reaches 20% of its full-scale value.

6.13.4 Response Time $T_{RESPONSE}$

The time interval between the sensed primary current reaches 90% of its final value and the sensor output voltage reaches 90% of its full-scale value.

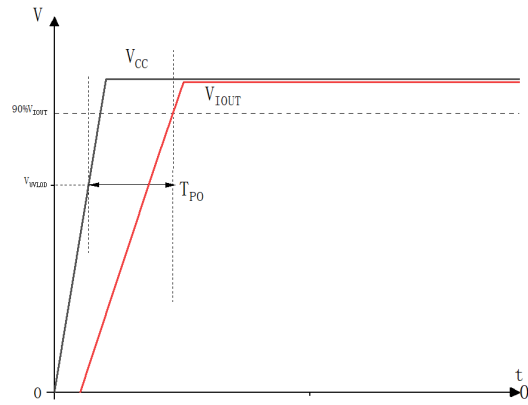


Figure 7. Power-On Time T_{PO}

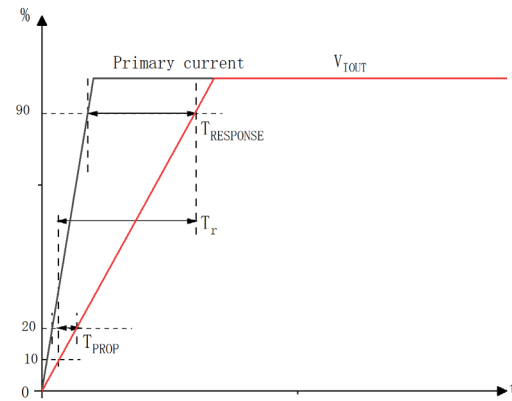


Figure 8 . Dynamic Response Time Parameters

7. THERMAL EVALUATION

The product will naturally heat up during using, and the thermal curve performance of this device was measured in a windless environment at $25\pm3^{\circ}\text{C}$ in Zhangjiagang application laboratory using a MSEVB0005GC1868REVA0 EVM.

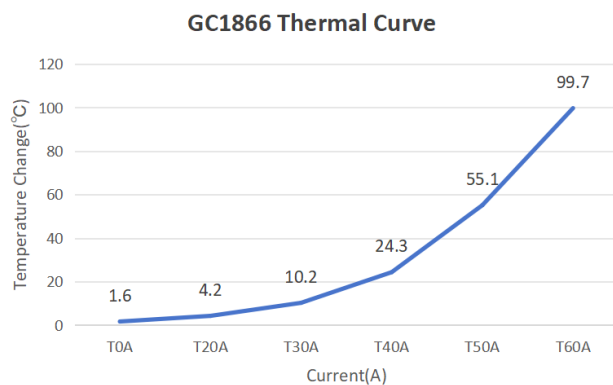


Figure 9. Thermal curve

8. LAYOUT GUIDELINES

Test information of the demo board

The IP heat dissipation copper thickness of the demo board is 4oz, the heat dissipation area is $2 \times 600 \text{ (mm}^2\text{)}$, the test wiring uses Kelvin sense to avoid the voltage drop caused by GND impedance, and capacitors should set to the chip pins as close as possible. $C_L=1\text{nF}$, $C_{REF}=1\text{nF}$, $C_{VCC}=100\text{nF}$

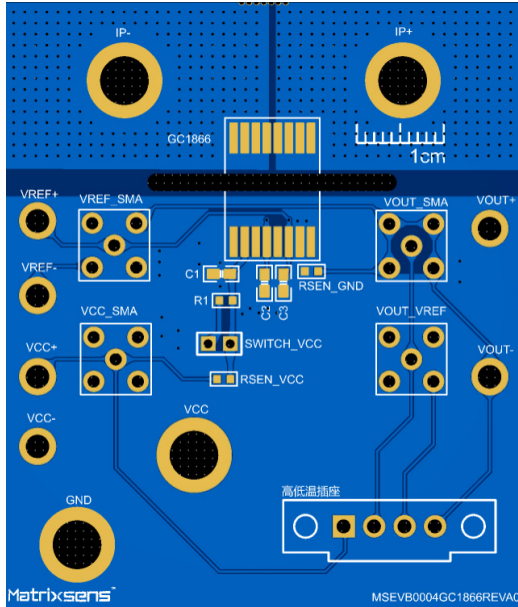


Figure 10. The front of the demo board

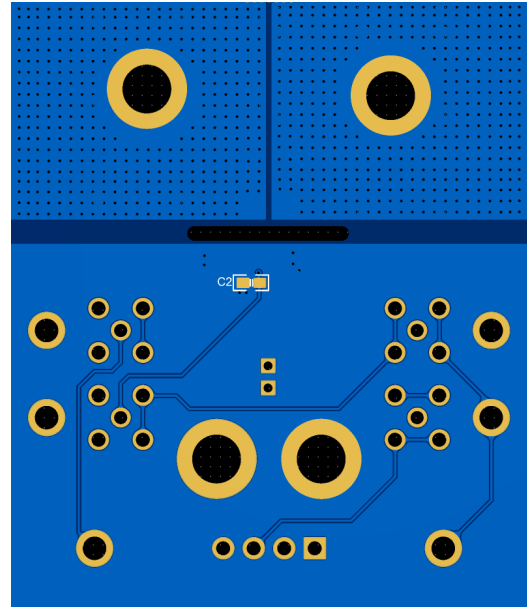


Figure 11. The back of the demo board

9. PACKAGE OUTLINE


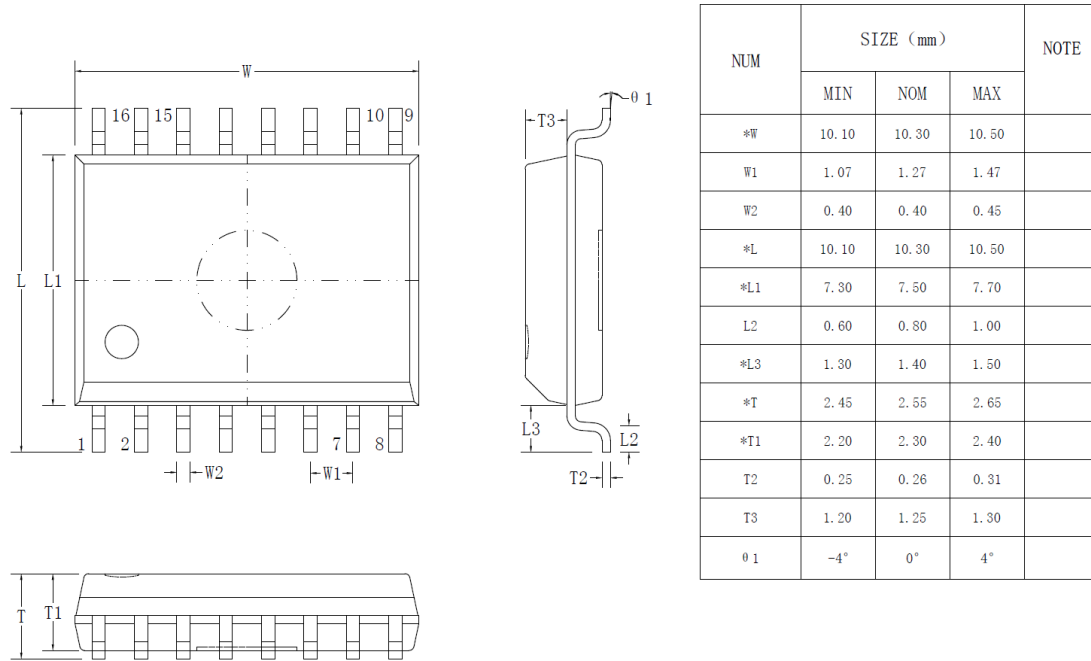


Figure 12. SOIC-8 Package

Example Board Layout:

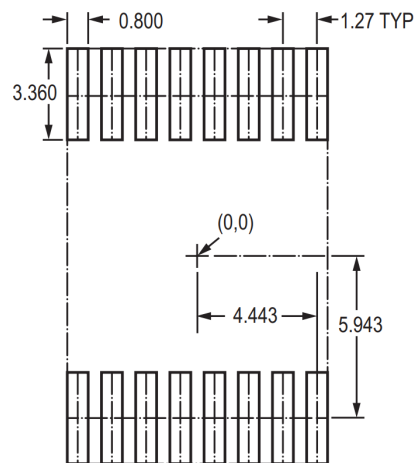

Unit:mm


General linear tolerance: $\pm 0.2\text{mm}$

Figure 13. Recommend pad size

10. TAPE AND REEL & STORAGE INFORMATION

10.1 Tape and reel


Note:1000 pieces per reel

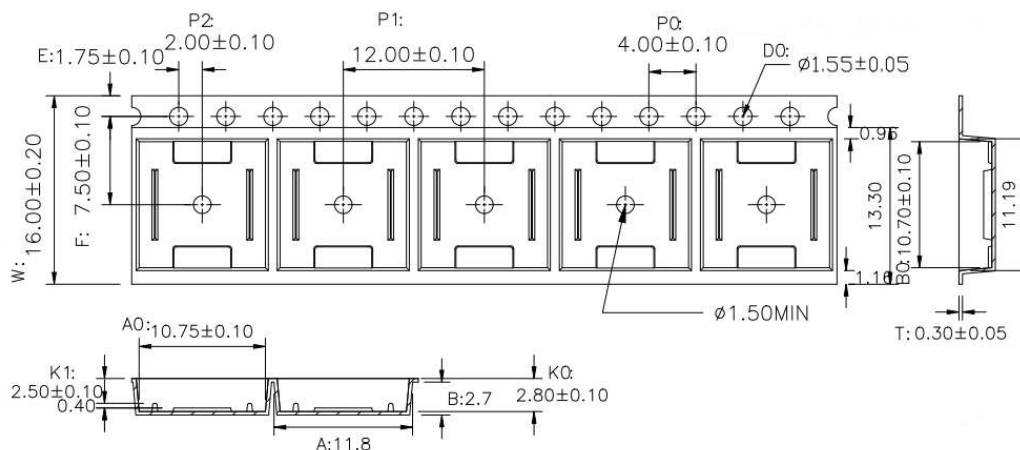

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy .
4. All dimensions meet EIA-481 requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Packing length per 22" reel : 378 Meters.
7. Component load per 13" reel : 1000 pcs.

Unit:mm

Figure 14. Tape rules

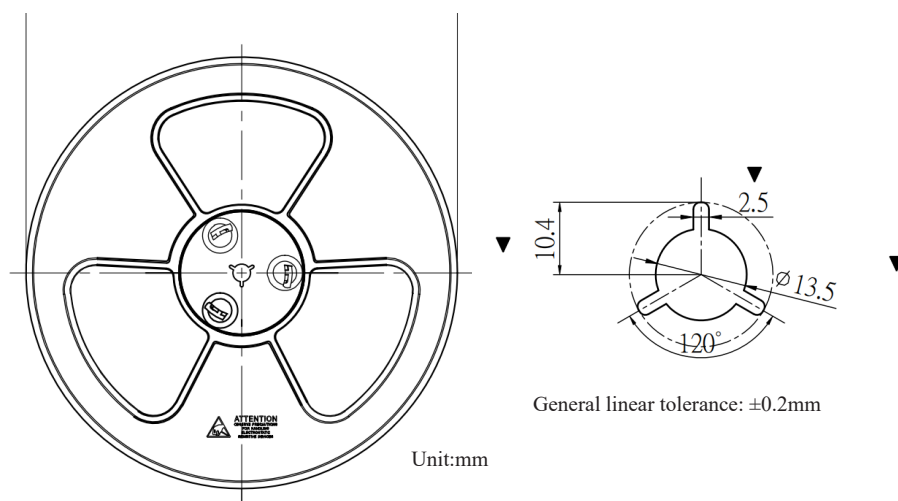

Unit:mm

Figure 15. Blue print

10.2 Storage information

10.2.1 The product should be stored at MSL3 standard.

11. SAFETY WARNING

The environmental requirements of this product are as follows:

11.1 ESD control should be done when touching the product.

11.2 The use of this product shall comply with the relevant provisions of local laws and regulations.

12.REVISION HISTORY

Number	Description	Date
V1.0	English version first release	2022-11
V1.1	Chinese version first release	2023-07
V1.2	Chinese and english version revision (temperature rise, application board, pad and other legend supplement)	2024-04
V1.3	English version revision (10A and 100A range increase)	2024-11
V1.4	English version revision (primary conductor resistance reduce)	2024-11