


# Relative and absolute pressure transmitter type 680

Pressure range  
0 ... 0.1 – 1000 bar

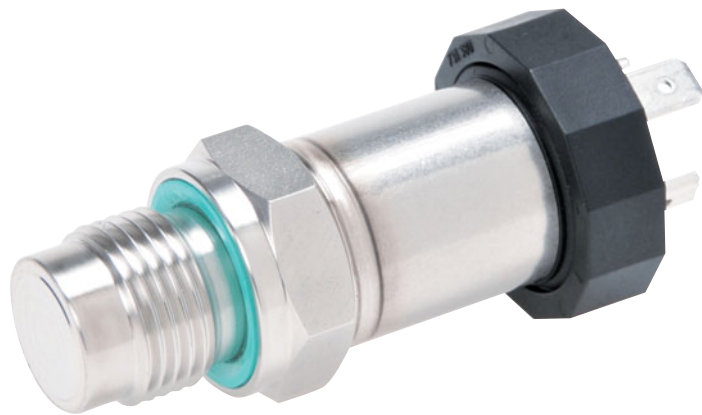

The pressure transmitters of type 680 with piezoresistive measuring elements have compensated, calibrated and amplified sensor signals which are available as standard voltage or current outputs.

The transmitter housing is available with various pressure and electrical connections.

Manufactured from stainless steel, its welded construction provides a watertight seal. With its sophisticated building block system, individual designs to meet specific applications are possible.

- Effective overload protection due to chemically etched chip diaphragm and specially designed glass gland
- Fast and affordable customer specific solutions due to building block system, even for small quantities
- Compact construction with SMD technology enhances operational reliability in the presence of shock and vibration
- Welded construction provides 100% sealing against media

## Technical overview

### Pressure type <sup>1)</sup>

Relative and absolute	0 ... 25 bar
Overpressure	> 25 ... 1000 bar

### Overload

At Pressure ranges 0.1 ... 2 bar	3x pressure range, min. 3 bar
At Pressure ranges > 2 ... 600 bar	3x pressure range, max. 850 bar
At Pressure ranges > 600 ... 1000 bar	1500 bar

### Rupture pressure

At Pressure ranges 0.1 ... 2 bar	> 200 bar
At Pressure ranges > 2 ... 600 bar	> 850 bar
At Pressure ranges > 600 ... 1000 bar	> 1500 bar

### Medium

Permissible medium	liquids and gases
--------------------	-------------------

### Material

Pressure connection, diaphragm, case	stainless steel 1.4435 (316L) (Titanium or Hastelloy C on request)
Sealing material	FPM (other on request)

### Temperature <sup>2)</sup>

Medium temperature	-40 ... +150 °C
Ambient temperature	-40 ... +125 °C
Storage temperature	-40 ... +125 °C

### Output and power supply <sup>3)4)</sup>

	output	power supply	permissible load <sup>5)</sup>
3-wire	0 ... 5 V 0 ... 10 V	12 ... 30 VDC 12 ... 30 VDC	> 10 kOhm > 10 kOhm
2-wire	4 ... 20 mA	9 ... 33 VDC	$\frac{\text{supply voltage} - 9\text{V}}{0.02\text{A}}$ [Ohm] max.
2-wire (Ex)	4 ... 20 mA	9 ... 28 VDC	$\frac{\text{supply voltage} - 9\text{V}}{0.02\text{A}}$ [Ohm] max.

### Ex-Version

	gas	dust
Ex-Admission (Depending on execution, see valid ATEX certificate)	II 1G Ex ia IIB/IIC T3 ... T6	II 1D Ex iaD 20 IP6x T145 ... T70 °C
Standards	EN 60079-0 / EN 60079-11	EN 61241-0 / EN 61241-11

### Temperature class Ex-Version

	T6	T4	T3
Ambient temperature Ta	-40 ... +50 °C	-40 ... +85 °C	-40 ... +125 °C
Medium temperature	-40 ... +50 °C	-40 ... +110 °C	-40 ... +150 °C

### Electrical connection

Cable	PUR, PE or Teflon in variable lengths <sup>6)</sup>
Connector <sup>7)</sup>	DIN EN 175301-803-A / Lumberg RSF 4 / RSF 50 / Binder 723

### Pressure connection

Inside thread	G ¼ <sup>1)</sup>
Outside thread	G ¼, G ½ <sup>1)</sup>

### Tests / Admissions

	norm	character	level
Mechanical load	EN 60068-2-6 EN 60068-2-27	vibration shock	10 g (4 ... 2000 Hz, oscillation ± 10 mmp) 100 g (pulse duration 6 ms)
Interference emit	EN 55022 EN 61000-4-2 EN 61000-4-3	emitted interference, class B discharge static electricity electromagnetic radiation	< 30 dBµV/m (0.03 ... 1 GHz) 8 kV contact-, 15 kV air discharge 10 V/m, 0.08 ... 2.7 GHz, 80% AM 1 kHz, 3s
Interference resistance	EN 61000-4-4 EN 61000-4-5 EN 61000-4-6	fast transients (burst) impulse voltage (surge) grid-bound electromagnetic blockage	4 kV Line-Line 0.5 kV/42 Ohm, Line-Earth 1 kV/42 Ohm 10 V, 0.15 ... 80 MHz, 80% AM 1 kHz, 3s

### Packaging

Single packaging	carton padded cellular material
------------------	---------------------------------

### Weight

Cable version (2 m)	~ 250 g
Connector version	~ 150 g

## Accuracy

	total error band <sup>(*)</sup> [±%fs] per pressure ranges [bar]				
	0.1 ... 0.5	> 0.5 ... 2	> 2 ... 100	> 100 ... 600	> 600 ... 1000
Characteristic line deviation [±%FS] 0.25 or 0.1 (typ./ max.) 0 ... +70 °C	1.0 / 1.5	0.7 / 1.0	0.7 / 1.0	0.7 / 1.0	0.7 / 1.0
(typ./ max.) -25 ... +100 °C	2.0 / 2.5	1.0 / 1.5	1.0 / 1.5	1.0 / 1.5	1.0 / 1.5
Characteristic line deviation [±%FS] 0.05 (typ. / max.) 0 ... +70 °C	–	0.3 / 0.5	0.3 / 0.5	–	–
(typ. / max.) -25 ... +100 °C	–	0.75 / 1.0	0.75 / 1.0	–	–

<sup>(\*)</sup> total error band incl. characteristic line deviation, temperature error zero point and operating range, hysteresis and repeatability at max. signal range.

<sup>1)</sup> See order code selection table. Other on request

<sup>4)</sup> Influence from the supply voltage types < 0.05% fs

<sup>7)</sup> Delivery without female connector

<sup>2)</sup> Compensated temperature range see order code selection table

<sup>5)</sup> Influence permissible load < 0.05% fs

<sup>3)</sup> Short circuit proof with polarity reversal protection

<sup>6)</sup> Standard length 2 m

Order code selection table 680. X X X X X X X X X X

Pressure type	Relative	8																				
	Absolute	7																				
	Overpressure	6																				
Pressure range <sup>1)</sup>	0 ... 100 mbar		0	0																		
	0 ... 160 mbar		0	1																		
	0 ... 250 mbar		0	2																		
	0 ... 400 mbar		0	3																		
	0 ... 600 mbar		0	4																		
	0 ... 1 bar		0	5																		
	0 ... 1.6 bar		0	6																		
	0 ... 2.5 bar		0	7																		
	0 ... 4 bar		0	8																		
	0 ... 6 bar		0	9																		
	0 ... 10 bar		1	0																		
	0 ... 16 bar		1	1																		
	0 ... 25 bar		1	2																		
	0 ... 40 bar	6	1	3																		
	0 ... 60 bar	6	1	4																		
	0 ... 100 bar	6	1	5																		
	0 ... 160 bar	6	1	6																		
	0 ... 250 bar	6	1	7																		
	0 ... 400 bar	6	1	8																		
0 ... 600 bar	6	1	9																			
0 ... 1000 bar	6	2	0																			
Output / power supply	0 ... 5 V	12 ... 30 VDC											0									
	0 ... 10 V	12 ... 30 VDC											1									
	4 ... 20 mA	9 ... 33 VDC											3									
	4 ... 20 mA	9 ... 28 VDC	intrinsically safe version <sup>2) 3)</sup>										4									
Characteristic line deviation	$\leq \pm 0.25\%$ fs																		1			
	$\leq \pm 0.10\%$ fs ( $\leq 600$ bar fs)																		2			
	$\leq \pm 0.05\%$ fs ( $\geq 0.5$ bar ... $\leq 100$ bar fs)													3,4	3				0,1,2,3			
Temperature range	0 ... + 70 °C compensated, medium temperature permissible: -40 ... +125 °C																			0		
	- 25 ... + 100 °C compensated, medium temperature permissible: -40 ... +125 °C																			1		
	- 25 ... + 100 °C compensated, medium temperature permissible: -40 ... +150 °C																			2		
	- 40 ... + 125 °C compensated, medium temperature permissible: -40 ... +125 °C																			3		
	Ex T6 (Ta: -40 ... +50 °C) 0 ... +70 °C compensated (medium temperature permissible: - 40 ... + 50 °C)													4	4							
	Ex T4 (Ta: -40 ... +85 °C) -25 ... +100 °C compensated (medium temperature permissible: - 40 ... + 110 °C)													4	5							
	Ex T3 (Ta: -40 ... +125 °C) -25 ... +100 °C compensated (medium temperature permissible: - 40 ... + 150 °C)													4	6							
Electrical connection	Connector	Fig. 1	Binder 723	5 pin	IP 67															0		
		Fig. 2	DIN EN 175301-803-A		IP 65																1	
		Fig. 3	Lumberg	4 pin RSF 4	IP 20																2	
		Fig. 4	Lumberg	5 pin RSF 50	IP 68	6,7															3	
	Cable <sup>4)</sup>	Fig. 5	PUR			IP 67															4	
		Fig. 6	PUR with kink guard			IP 67															5	
		Fig. 5	Teflon			IP 67															9	
Pressure connection	Inside thread	Fig. 10	G ¼																	0	0	
		Fig. 11	G ¼																	0	1	
		Fig. 12	G ¼ manometer DIN 16288																	0	2	
	Outside thread	Fig. 13	G ½																		0	3
		Fig. 14	G ½ diaphragm at front																		0	4
		Fig. 15	G ½ diaphragm flush with front																		0	5
		Fig. 16	G ½ manometer DIN 16288																		0	6
Version																				N		

<sup>1)</sup> Other pressure ranges on request

<sup>2)</sup> II 1G Ex ia IIB/IIC T3...T6 / II 1D Ex iaD 20 IP6x T145...T70°C (Depending on execution, see valid ATEX certificate)

<sup>3)</sup> Indicate correct medium

<sup>4)</sup> Length of cable 2 m (other lengths on request)

Fig. 10




Fig. 11




Fig. 12




Fig. 13




Fig. 14




Fig. 15






Fig. 16



Version for medium temperature up to +125 °C



Version for medium temperature > +125 ... max. +150 °C

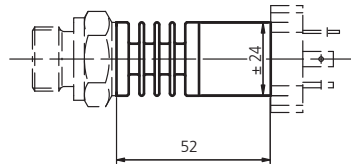


Fig. 1

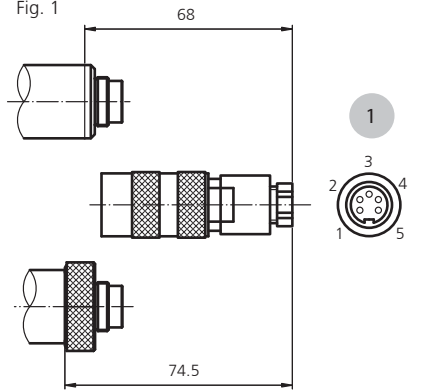


Fig. 2

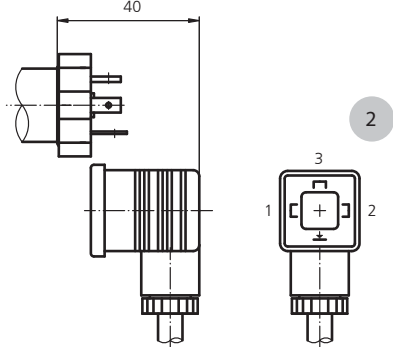


Fig. 3

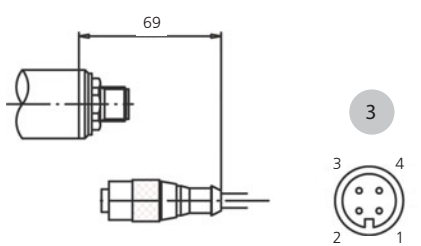


Fig. 4

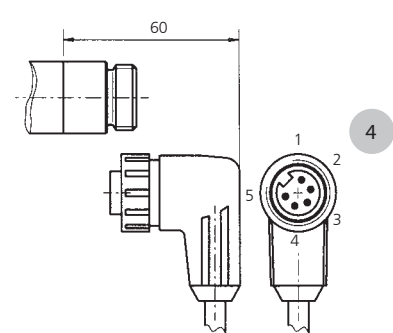


Fig. 5





Fig. 6



	Pin / Colour	2-wire	3-wire
1	1	OUT	OUT
	3	IN	IN
	4		GND
2	1	IN	IN
	2	OUT	OUT
	3		GND
3	1		GND
	3	OUT	OUT
	4	IN	IN
4	1	OUT	OUT
	3	IN	IN
	4		GND
5	white	IN	IN
	yellow	OUT	GND
	brown		OUT

### Huba Control AG

#### Headquarters

Industriestrasse 17  
5436 Würenlos  
Telefon +41 (0) 56 436 82 00  
Telefax +41 (0) 56 436 82 82  
info.ch@hubacontrol.com

### Huba Control AG

#### Niederlassung Deutschland

Schlattgrabenstrasse 24  
72141 Walddorfhäslach  
Telefon +49 (0) 7127 23 93 00  
Telefax +49 (0) 7127 23 93 20  
info.de@hubacontrol.com

### Huba Control SA

#### Succursale France

Rue Lavoisier  
Technopôle Forbach-Sud  
57602 Forbach Cedex  
Téléphone +33 (0) 387 847 300  
Télécopieur +33 (0) 387 847 301  
info.fr@hubacontrol.com

### Huba Control AG

#### Vestiging Nederland

Hamseweg 20A  
3828 AD Hoogland  
Telefoon +31 (0) 33 433 03 66  
Telefax +31 (0) 33 433 03 77  
info.nl@hubacontrol.com

### Huba Control AG

#### Branch Office United Kingdom

Unit 13 Berkshire House  
County Park Business Centre  
Shrivenham Road  
Swindon - Wiltshire SN1 2NR  
Phone +44 (0) 1993 776667  
Fax +44 (0) 1993 776671  
info.uk@hubacontrol.com