
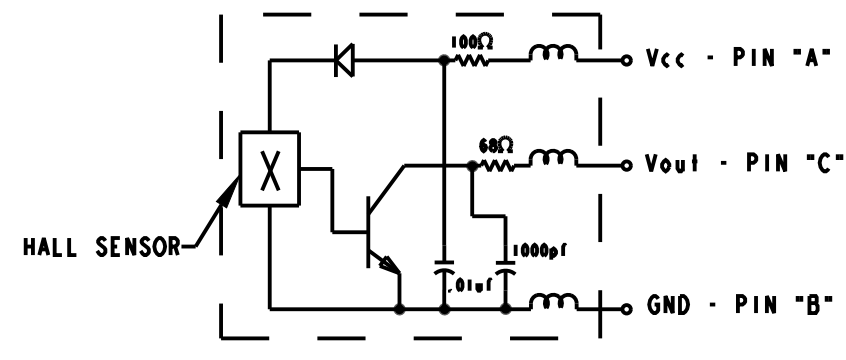
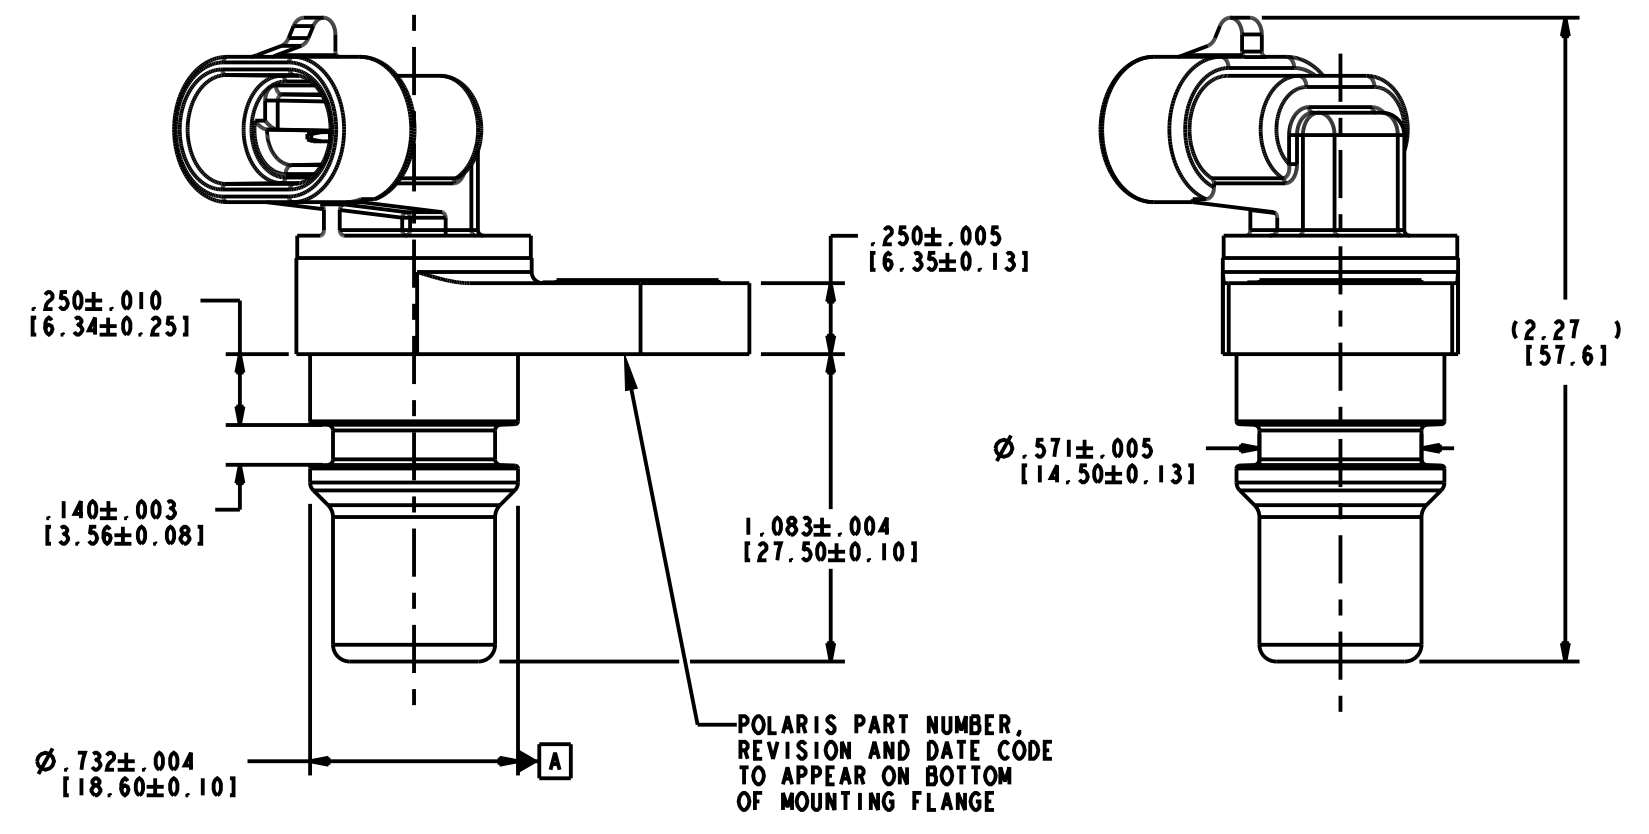



FO-55112-B
HONEYWELL
 PART NUMBER
 727679-09

REV	DOCUMENT	CHANGED BY	CHECK
A	0083569	DSK 03NOV11	MBN

- NOTES:
 1. CUSTOMER: POLARIS INDUSTRIES INC.
 POLARIS PART NUMBER: 4013908
 2. TECHNICAL SPECIFICATIONS:
 POWER REQUIREMENT: 6.5 - 26.5 VDC
 INPUT CURRENT: 14 mA MAX
 OUTPUT (OPEN COLLECTOR TRANSISTOR): 20 mA SINK
 AIR GAP 0.079 [2.0] MAX
 AIR GAP DATA OBTAINED WITH P30 TARGET
 MAX AIR GAP MUST BE VERIFIED FOR EACH APPLICATION
 SPEED: 0 TO 12 KHz
 TEMPERATURE RANGE: -40°C TO +125°C
 CONNECTOR TYPE: DELPHI-PACKARD
 METRIPAK - 150.2, TYPE 101
 MATES WITH PACKARD - 12162185
 3. RECOMMENDED O-RING:
 Ø.549 ID X Ø.103 CROSS-SECTION WIDTH

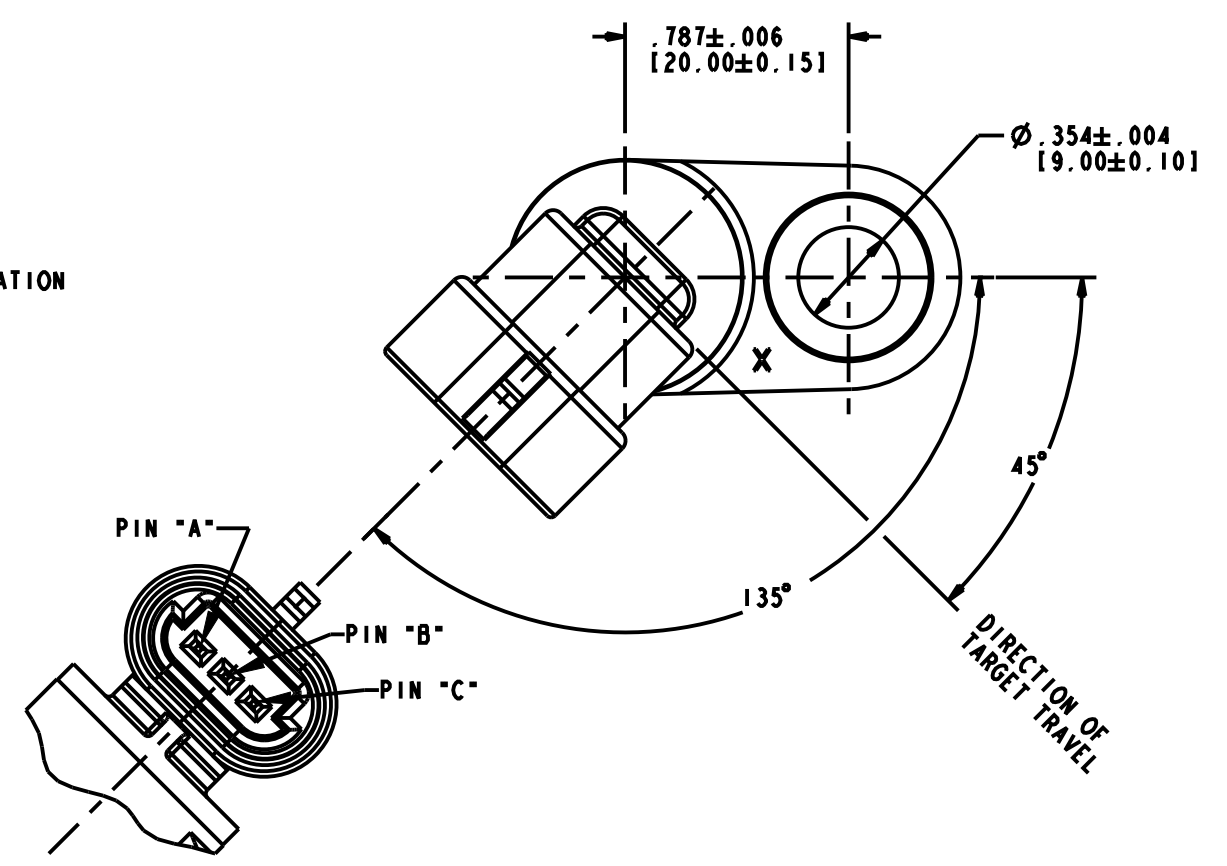

DESIGN UNITS: INCH [MM]	DRAWN	DSK	03NOV11	Honeywell
TOLERANCES UNLESS NOTED:	CHECK	MGM	03NOV11	
NO PLACES .X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL.			TITLE
ONE PLACE .X ±	THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			POLARIS MPH SENSOR, ATV
TWO PLACE .XX ±	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE C TYPE I DRAWING NAME 727679-09 REV A
THREE PLACE .XXX ±	Pro/ENGINEER			3D SCALE 2:1 SHEET 1 OF 1
ANGLES X ±				

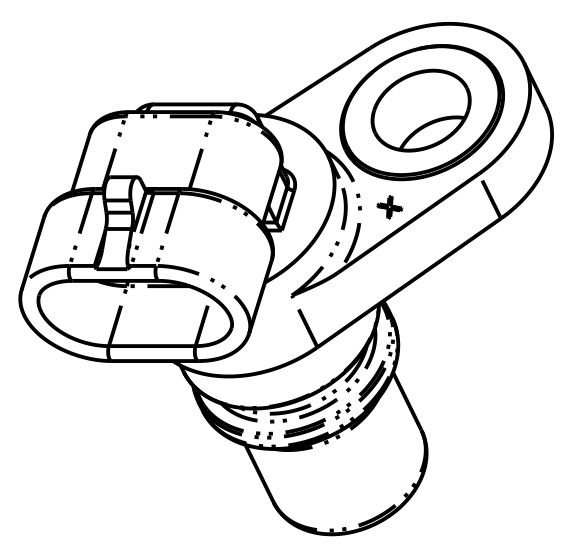

ITEM	PART NO.	PART NAME	QTY.
MASS: N/A lb		VOLUME: N/A in3	
UNLESS OTHERWISE SPECIFIED: TOLERANCE: X ± XX ± XXX ± ANGLE ±		INCH DRAWING - in	
DO NOT SCALE PRINT		PRODUCT LINE 3D MODEL - Creo	
MATERIAL AND SPECIFICATIONS		ATV NAME DATE	
SEE ABOVE		DRAWN BY A.RIPLEY 13-OCT-15	
		DESIGNER -- --	
		CHECKER -- --	
		ENGINEER -- --	
		PART NO. 4016191	
		SIZE C	
		REV A	
		SHEET NO. 1 OF 1	

REV	DESCRIPTION	BY	DATE
01	INITIAL RELEASE	AJR	13-OCT-15
REV	APR	WIP	13-OCT-15